

# HAMMER PLUG TECHNICAL SPECIFICATIONS




## TECHNICAL FEATURES

- AT-15-4237/2006
- ETA-12/0457




- **APPLICATION:**  
For all kind of installation. Allows fast fixing.

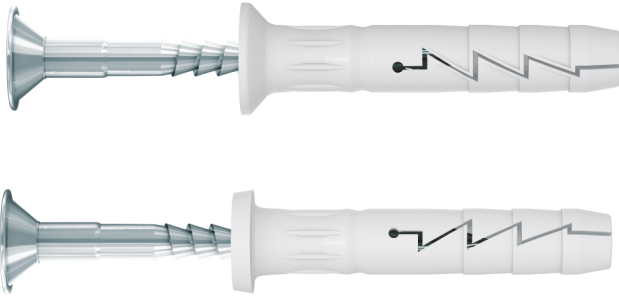

- **FEATURES:**  
Fixing with hammer. Once installed it can be removed with a screwdriver. Its collar avoid the plugs to enter into the hole.
- **MATERIAL:**  
Plug: Polypropylene (PP)  
Screw: Zinc plated carbon steel. Zinc coating thickness min. 5 m.



## TECHNICAL FEATURES

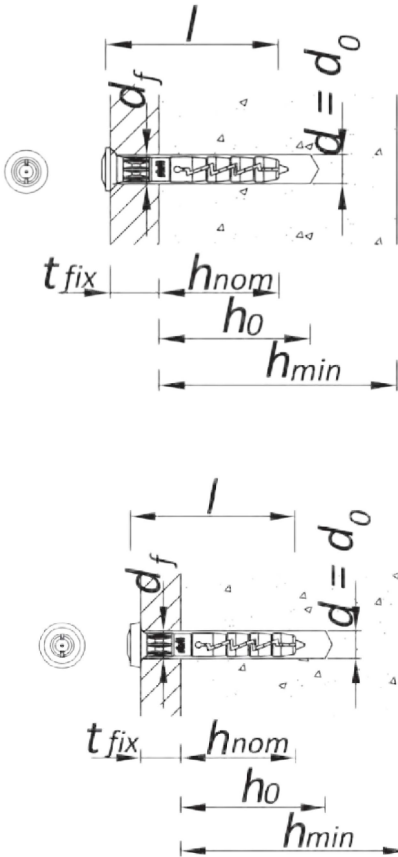

Size	Product code			Plug		Fixture	
	Plug collar type			Diameter	Length	Max thickness	Hole diameter
	Countersunk	Flange	Cylinder	d [mm]	l [mm]	t <sub>fix</sub> [mm]	d <sub>f</sub> [mm]
Ø5	FX-05L025	-	-	5	25	1	6
	FX-05L030	FX-05K030	FX-05C030		30	5	
	FX-05L035	FX-05K035	FX-05C035		35	10	
	FX-05L040	FX-05K040	FX-05C040		40	15	
	FX-05L050	FX-05K050	FX-05C050		50	25	
Ø6	FX-06L030	FX-06K030	FX-06C030	6	30	1	7
	FX-06L035	FX-06K035	FX-06C035		35	6	
	FX-06L040	FX-06K040	FX-06C040		40	11	
	FX-06L045	FX-06K045	FX-06C045		45	16	
	FX-06L050	FX-06K050	FX-06C050		50	21	
	FX-06L055	FX-06K055	FX-06C055		55	26	
	FX-06L060	FX-06K060	FX-06C060		60	31	
	FX-06L070	FX-06K070	FX-06C070		70	41	
Ø8	FX-08L045	FX-08K045	FX-08C045	8	45	5	9
	FX-08L060	FX-08K060	FX-08C060		60	20	
	FX-08L080	FX-08K080	FX-08C080		80	40	
	FX-08L100	FX-08K100	FX-08C100		100	60	
	FX-08L120	FX-08K120	FX-08C120		120	80	
	FX-08L140	FX-08K140	FX-08C140		140	100	
	FX-08L160	FX-08K160	FX-08C160		160	120	