




# FICHA TÉCNICA PERNOS DE ANCLAJE

## Resistencias:

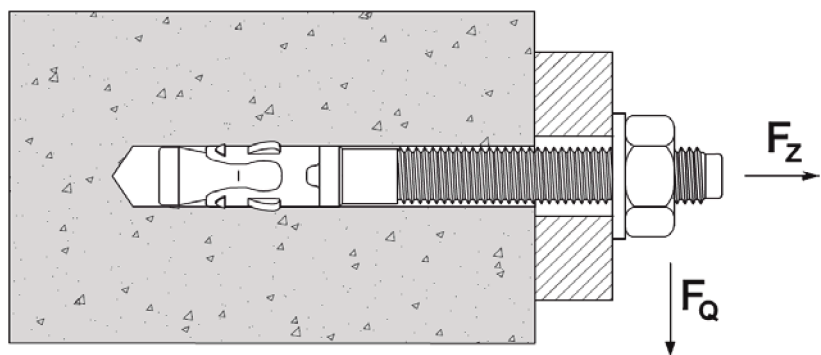

**10 N = 1 Kg.**  
**1 kN = 100 Kg.**

Código	Medida	Extracción Fz kN (C20/25)	Cizalladura Fq kN (C20/25)	Coeficientes de Seguridad	
				Extracción	Cizalladura
15440	M6 x 45	6.30	5.10	1.50	1.25
15441	M6 x 60	7.70	5.10	1.40	1.25
15442	M6 x 80	7.70	5.10	1.40	1.25
15443	M8 x 50	5.60	5.60	1.50	1.50
15444	M8 x 75	12	9.30	5	1.25
15445	M8 x 90	12	9.30	20	1.25
15446	M8 x 115	12	9.30	45	1.25
115447	M10 x 65	12.80	12.80	1.80	1.50
15448	M10 x 90	16	14.70	1.50	1.50
15449	M10 x 100	16	14.70	1.50	1.50
15450	M10 x 120	16	14.70	1.50	1.50
15451	M12 x 75	14.20	14.20	1.80	1.25
15452	M12 x 100	25	20	1.80	1.25
15453	M12 x 140	25	20	1.80	1.25
15454	M12 x 180	25	20	1.80	1.25
15455	M16 x 110	17.30	17.30	1.80	1.50
15456	M16 x 125	35	38.40	1.80	1.25
15457	M16 x 145	35	38.40	1.80	1.25
15458	M16 x 170	35	38.40	1.80	1.25
15459	M16 x 220	35	38.40	1.80	1.25
15460	M20 x 170	50	56.30	1.80	1.25
15461	M20 x 220	50	56.30	1.80	1.25

**Se recomienda aplicar un Coeficiente de Seguridad de 1,4**

