ABRAFIX TECHNICAL SPECIFICATIONS

MAIN CHARACTERISTICS

- **APPLICATION:**
  For the installation of water pipes, electricital, gas, heating, air conditioning pipes etc.
- **CHARACTERISTICS:**
  High thermal resistance (from -40 to +80 ºC).
  Its high resistance allows safer installations.
  Quick and easy to install. By a simple pressure (click)
  .Possibility to fix with M6 screws, traditional screws, hammer plugs and on profiles.
- **MATERIAL:**
  Manufactured in Polyamide 6 (Nylon).
  White color and with M6 insert.

TECHNICAL SPECIFICATIONS

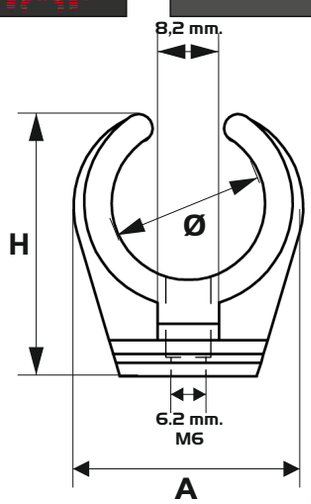

POLIAMIDA / POLIAMIDE
MODELO PATENTADO / PATENT MODEL
ULTRAVIOLETA / ULTRAVIOLET
LIBRE DE HALÓGENOS / HALOGEN FREE
TEMPERATURAS EXTREMAS / EXTREME TEMPERATURES
PROTECCIÓN DEL SONIDO / SOUND PROTECTION
RESPETA MEDIO AMBIENTE / RESPECT THE ENVIRONMENT
CUMPLE / COMPLIANT

COD	Ø	A	H	Box	Package
14112	12	19,50	22,00	100	1.200
14115	14-15	24,00	26,00	100	600
14118	16-18	26,00	31,50	100	600
14122	20-22	31,00	38,00	100	600
14125	25	33,20	39,70	100	600
14128	28	40,30	45,20	50	300


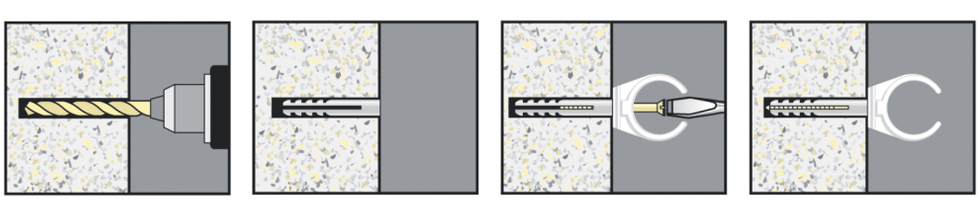
Ø PIPE	Kg
12	6,39
14	8,27
15	8,81
16	9,39
18	10,75
20	9,42
22	14.97
25	6,39
28	9,80